

P

roduct Brief


High-Sensitivity Ultra-High-Speed NEO Series

High-Sensitivity Ultra-High-Speed camera adopted a new generation of BSI sensor, which improve the capture efficiency of incident photons and realizes transient image capture within short exposure time, and is applied in the fields of hypersonic gas dynamics, high-speed shock and vibration and bubble dynamics.

NEO 25M/C 1280x1024 @25000 fps

NEO 20M/C 1280x1024 @20000 fps

NEO 16M/C 1280x1024 @16000 fps

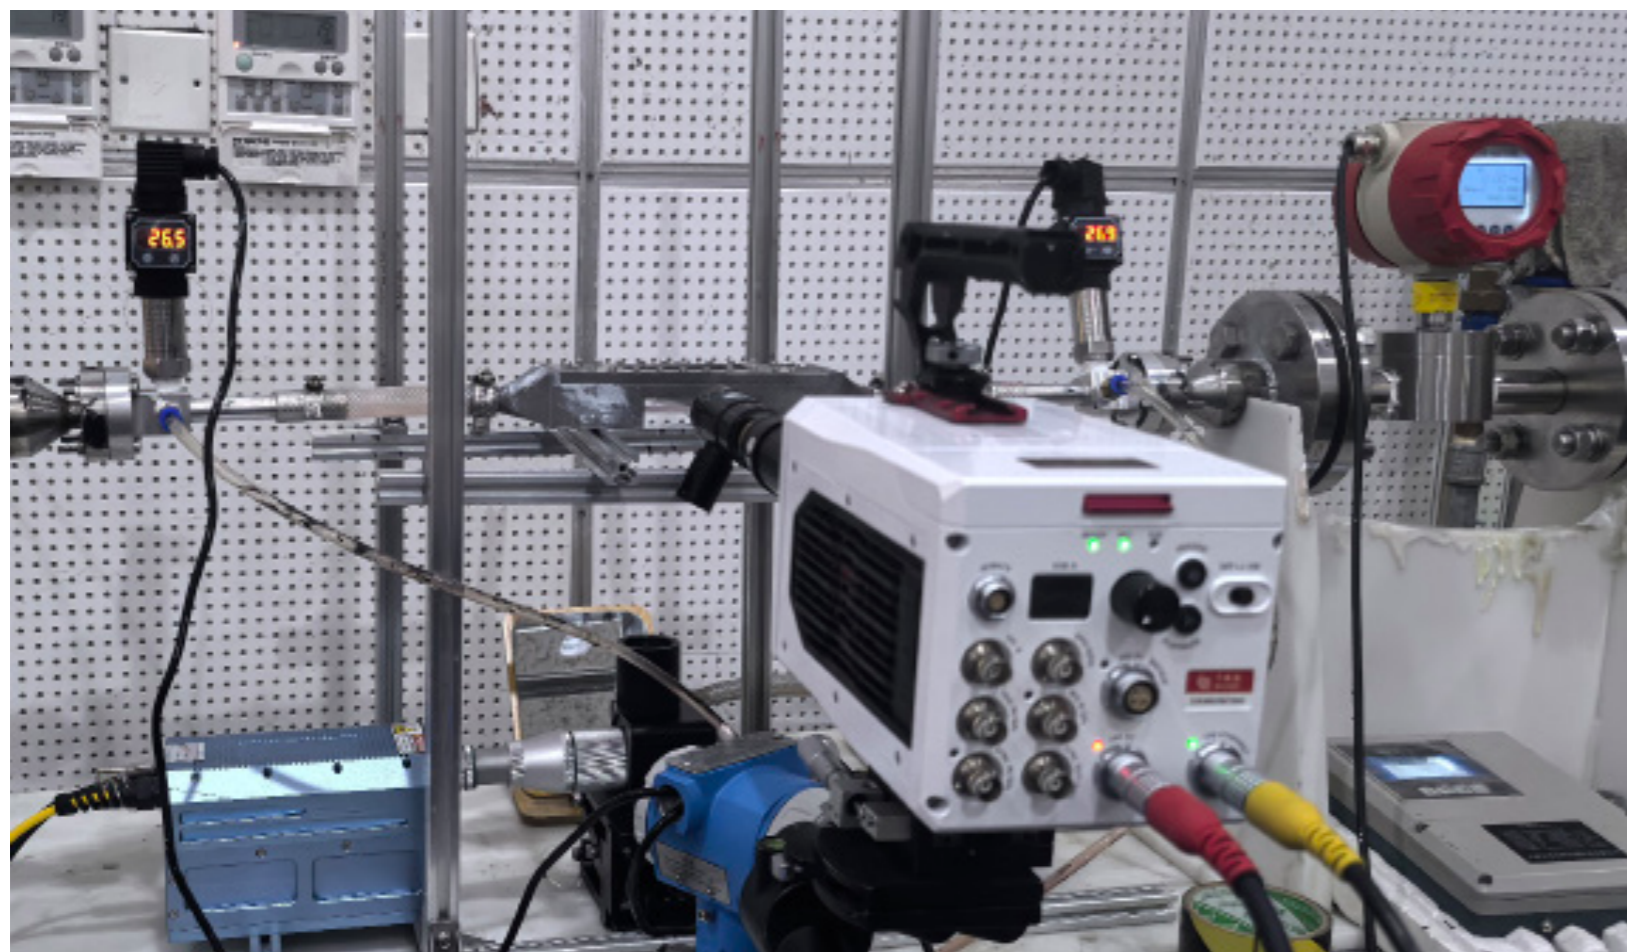

K




ey Features



Peak QE 85%	High-Sensitivity & Ultra-High-Speed Sensor BSI CMOS	High-Speed RAM 160/320 GB
1,000,000 fps At 1280x16 @		
Built-in mechanical shutter	<ul style="list-style-type: none"> • 10Gb network interface • SDI/HDMI video interface • IRIG_B code timing input interface • Dual power interface 18-28VDC 	IP64 protection standard
-35° ~ 60 °C Customizable wide temperature range		30Grms @11ms 3-axis 6-direction 60 pulses
250 ns Straddle time for PIV	Intelligent Trigger Capture	Anti-transport vibration
		EMC EMC protection

High-Sensitivity Ultra-High-Speed NEO Series

Typical Cases

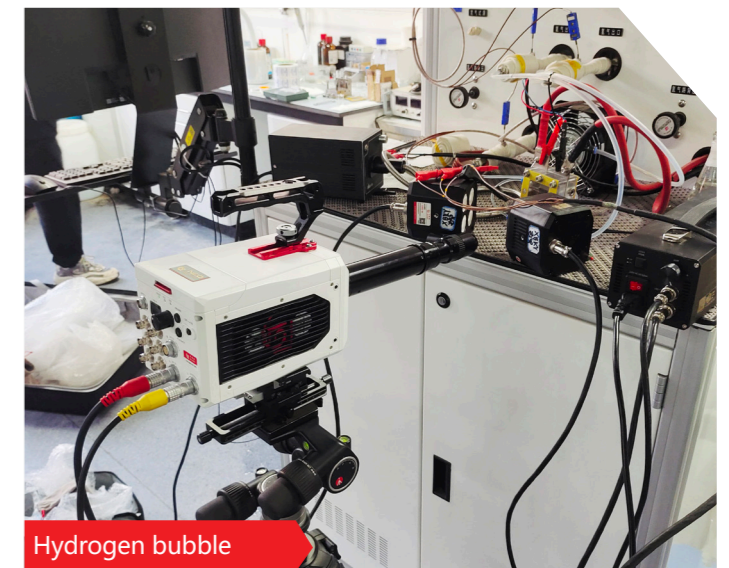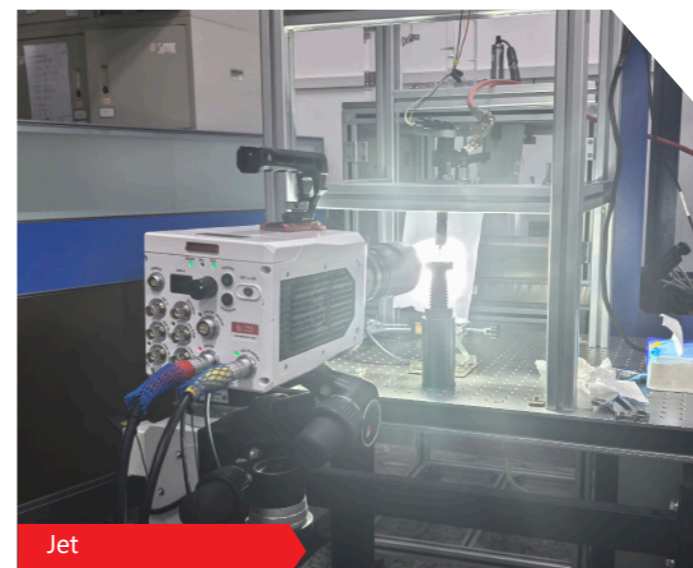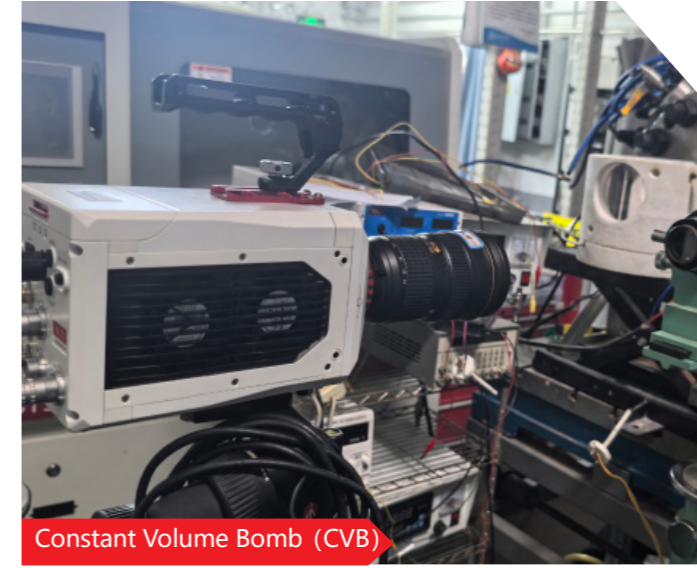

High-Sensitivity Ultra-High-Speed NEO Series

Product Parameters

Key parameters

SKU	NEO 25M/C	NEO 20M/C	NEO 16M/C
Sensor	BSI CMOS	BSI CMOS	BSI CMOS
Resolution	1280×1024	1280×1024	1280×1024
Frame	25000 fps	20000 fps	16000 fps
Shutter	Global shutter	Global shutter	Global shutter
Min. exposure time	150 ns	150 ns	150 ns
PIV	250 ns	250 ns	250 ns
AE	Available	Available	Available
EDR	Available	Available	Available

Resolution-Frame- Recording time

SKU	NEO 25M/C(Based on 160GB)		NEO 20M/C(Based on 160GB)		NEO 16M/C(Based on 160GB)	
	Resolution	Frame rate	Recording Time	Frame rate	Recording Time	Frame rate
1280×1024	25000	3.15	20000	4.19	16000	5.49
1280×896	28700	3.17	22900	4.21	18000	5.51
1280×720	35000	3.20	28000	4.25	22000	5.57
1280×640	39500	3.23	31600	4.28	25000	5.60
1280×512	49000	3.28	39200	4.53	31300	5.68
1280×256	92000	3.53	73600	4.66	58800	6.08
1280×16	1000000	5.71	800000	7.39	600000	9.48

Connectivity & Signaling

SKU	NEO 25M/C	NEO 20M/C	NEO 16M/C
Record button	Available	Available	Available
Data interface	10 Gb/ Gb Ethernet	10 Gb/ Gb Ethernet	10 Gb/ Gb Ethernet
Video interface	SDI/HDMI	SDI/HDMI	SDI/HDMI
Sync Input Interface	3.3/5V TTL	3.3/5V TTL	3.3/5V TTL
Sync Output Interface	5V TTL	5V TTL	5V TTL
Timing	DC IRIG_B in	DC IRIG_B in	DC IRIG_B in
Control interface	Reserve RS422	Reserve RS422	Reserve RS422
Trigger Input	Pulse trigger signal	Pulse trigger signal	Pulse trigger signal
I/O	1 output reserved for customization	1 output reserved for customization	1 output reserved for customization

Memory

SKU	NEO 25M/C	NEO 20M/C	NEO 16M/C
High-Speed RAM	160/320 GB	160/320 GB	160/320 GB

Mechanical Specifications

SKU	NEO 25M/C	NEO 20M/C	NEO 16M/C
Lens	EF standard,F optional, C optional	EF standard,F optional, C optional	EF standard,F optional, C optional
Size W×H×D	≤ 125×125×210 mm	≤ 125×125×210 mm	≤ 125×125×210 mm
Weight	≤ 4500 g	≤ 4500 g	≤ 4500 g
Mounting hole	Top Bottom Left and right sides with 1/4 threaded mounting holes	Top Bottom Left and right sides with 1/4 threaded mounting holes	Top Bottom Left and right sides with 1/4 threaded mounting holes
Cooling	Fans	Fans	Fans

Electrical Specifications

SKU	NEO 25M/C	NEO 20M/C	NEO 16M/C
Electricity supply	24VDC	24VDC	24VDC
Power wastage	≤ 200 W	≤ 200 W	≤ 200 W

Environmental Specifications

SKU	NEO 25M/C	NEO 20M/C	NEO 16M/C
Operating temperature	-10 ~ 50 °C	-10 ~ 50 °C	-10 ~ 50 °C
Operating temperature optional	-35~ 60 °C	-35~ 60 °C	-35~ 60 °C
Operating humidity	0~95%	0~95%	0~95%
Protection level	IP64	IP64	IP64
Shock	30Grms @11mSec 3 axes 60 pulses	30Grms @11mSec 3 axes 60 pulses	30Grms @11mSec 3 axes 60 pulses
Vibration	Resistant to transportation vibration	Resistant to transportation vibration	Resistant to transportation vibration
EMC	Available	Available	Available

Dimension Drawing

NEO 25M/C NEO 20M/C NEO 16M/C

